

MiVoice Integration for Salesforce Administration Guide

NOVEMBER 2015

RELEASE 2.0



NOTICE

The information contained in this document is believed to be accurate in all respects but is not warranted by Mitel Networks™ Corporation (MITEL®). The information is subject to change without notice and should not be construed in any way as a commitment by Mitel or any of its affiliates or subsidiaries. Mitel and its affiliates and subsidiaries assume no responsibility for any errors or omissions in this document. Revisions of this document or new editions of it may be issued to incorporate such changes.

No part of this document can be reproduced or transmitted in any form or by any means - electronic or mechanical - for any purpose without written permission from Mitel Networks Corporation.

Trademarks

The trademarks, service marks, logos and graphics (collectively "Trademarks") appearing on Mitel's Internet sites or in its publications are registered and unregistered trademarks of Mitel Networks Corporation (MNC) or its subsidiaries (collectively "Mitel") or others. Use of the Trademarks is prohibited without the express consent from Mitel. Please contact our legal department at legal@mitel.com for additional information. For a list of the worldwide Mitel Networks Corporation registered trademarks, please refer to the website: <http://www.mitel.com/trademarks>.

MiVoice Integration for Salesforce Administration Guide

Release 2.0
November 2015

®,™ Trademark of Mitel Networks Corporation
© Copyright 2015, Mitel Networks Corporation
All rights reserved

About MiVoice Integration for Salesforce

MiVoice Integration for Salesforce provides a rich set of computer telephony and other user productivity features for browser-based users of MiVoice Business and the Salesforce Customer Relationship Management (CRM) solution. MiVoice features are fully embedded and integrated within the Salesforce contact window (examples shown below) when using an internet browser and include:


- Inbound features (screen-pop, and answer call)
- Mid-call features (transfer, conference, hold or retrieve call; logging of call notes)
- Outbound features (search for contacts, and click-to-dial)

This document is intended to help system administrators with the installation, configuration, and upgrade of the MiVoice Integration for Salesforce. The *MiVoice Integration for Salesforce User Guide* describes how to use the MiVoice client in the Salesforce environment, and should be provided to users.


Idle state



Active call

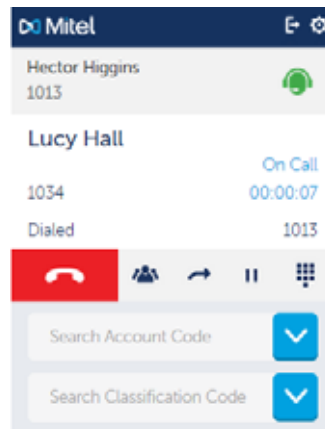

Call Complete

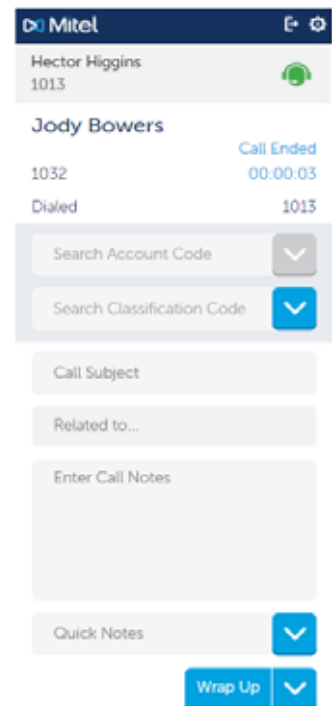

New for MiVoice Integration for Salesforce 2.0

- Supports the E.164 directory for calling international numbers.
- Supports the Salesforce Console mode. In console mode, the MiVoice Integration for Salesforce UI is presented in the bottom right hand corner of the browser window.
- Supports the Security role in MiContact Center. See the *MiContact Center Management Installation Guide* for information about the use of Security roles.
- Support for account codes and classification codes programmed in MiContact Center. See the *MiContact Center User Guide* for information about programming account and classification codes. Classification codes are tied to the Work timer. If the Classification code is required, the agent must add the Classification code before being able to cancel work timer. (ACD calls only)
- Make Busy with reason code is now available to agents. The reason code choices are set in the MiContact Center.

Important Notes:

- The Salesforce solution must use SSL for all web services communication.
- Before deploying the MiVoice Integration for Salesforce in a production environment, Mitel strongly recommends that application behavior be tested comprehensively with the specific SIP endpoints intended for use.
- MiVoice Integration for Salesforce does not support SIP phones.

This document contains the following sections:

- “Installation and configuration” on page 3
 - “Prerequisites” on page 3
 - “Download the MiVoice Integration for Salesforce” on page 4
 - “Run the MiVoice Integration for Salesforce package installer” on page 5
 - “Configure Call Centers” on page 6
 - “Configure the MiCC Edition Advanced Queries field” on page 9
 - “Create a new call center” on page 13
 - “Add users to a Call Center” on page 15
 - “Create a custom Salesforce user profile” on page 17
 - “Send instructions to each new user” on page 17
- “Upgrade” on page 19
- “Troubleshooting tips” on page 19

Installation and configuration

Install and configure the Mitel MiVoice Integration for Salesforce by completing the following procedures. The prerequisites and each procedure must be completed for the integration to be successful.



Note: The Salesforce solution must use HTTPS for all web services communication.

Prerequisites

To simplify installing and configuring the MiVoice Integration for Salesforce, ensure the following prerequisites are met:

- MiVoice Business is configured and functional.
- The IP address of the MiVoice Business server is available.
- Telephone sets are programmed and functional for each user.
- The mapping of each Salesforce user phone number (DN) to a specific MiVoice Business Controller IP address is defined.
- Licensing is in place for
 - Mitel OIG server (OIG or MiVoice Integrations Base Package, virtual or physical) is functional and licensed for MiVoice Integration for Salesforce.
 - MiVoice Integrations require a MiVoice Integration license using one of the deployment options. Refer to the *Mitel OIG Installation & Maintenance Guide* for details.
 - If using the MiContact Center Edition, additional licensing is in place for Advanced Call Control, MiContact Center, and MiVoice Integration for Salesforce.
 - Salesforce licenses must be purchased directly from Salesforce.



Note: If there are problems with any of the licenses, the errors will be displayed to users.

- The FQDN (required for CA certificates) of the Mitel OIG server is available.
- MiVoice Integration for Salesforce **local password**, configured in the Mitel OIG, is available.
- A certificate strategy for the Mitel OIG server is in place. If remote users plan to use MiVoice Integration for Salesforce, then a MiVoice Border Gateway with web proxy service must be used to proxy remote requests to the Mitel OIG server within the enterprise, and the MiVoice Border Gateway server must also have a CA certificate.



Note: Installing a CA certificate on the Mitel OIG server is required.

- A MiVoice Border Gateway web proxy server (MBG 8.1 or newer version) is required to enable remote Salesforce users (outside the Enterprise Network) access to the MiVoice Integration for Salesforce web application. The MBG web proxy allows a web browser with Salesforce and MiVoice Integration to access the Mitel OIG server within the Enterprise.

See the *MiVoice Border Gateway Installation & Maintenance Guide* for instructions on how to configure the web proxy feature for MiVoice Integration.



Note: The WAN-side FQDN for the Mitel OIG server used for the remote Mitel OIG application must match the LAN-side FQDN for the Mitel OIG server within the enterprise network when configuring the Mitel MBG web proxy.

- Add the Mitel OIG to the SDS Sharing network with MiVoice Business Cluster. See the *Mitel OIG Installation & Maintenance Guide* for more information.
- For MiContact Center (MiCC) Edition only: MiContact Center is configured and connected to the MiVoice Business controller. The IP address of the MiContact Center server is available.

Install MiVoice Integration for Salesforce

1. Log in to Mitel Standard Linux (MSL).
2. Click on **Mitel OIG** to get to the Mitel OIG console.
3. Under ServiceLink (left column), click **Blades**.
4. Install the **MiVoice Integration for Salesforce** blade. For details, see the MSL online help.

Download the MiVoice Integration for Salesforce

1. Open the Salesforce App Exchange website:
<https://appexchange.salesforce.com>.
2. Login using your Administrator credentials.



Note: <https://appexchange.salesforce.com/gettingStarted> provides help with using the Salesforce App Exchange website.

3. Search for **Mitel MiVoice Integration for Salesforce** on the Salesforce App Exchange.
4. Mouse-over the application in the results list, and click **More** from the list that appears.

A page opens with details about the application.

5. Click **Get It Now**.

The page refreshes with a choice of installing in Production or in a Sandbox.

6. Select the **Sandbox** or **Production** install.

Enter your administrator credentials and acknowledge the user terms.



Note: Mitel recommends testing your MiVoice Integration for Salesforce in a sandbox environment before deploying to production. Sandbox installations may require additional information related to setting up a test environment.

7. Click **Continue** to download the MiVoice Integration for Salesforce managed package.
8. Acknowledge each of the messages that is presented.

When the series of prompts is completed, the Mitel MiVoice Integration for Salesforce package is ready to be installed.

Run the MiVoice Integration for Salesforce package installer


1. Approve the Package API Access.

For typical installations, the access permissions can be left at their default values.


2. Select the security level.

The recommended selection is **Grant access to all users**.

3. Click **Install** to install the packaged API.

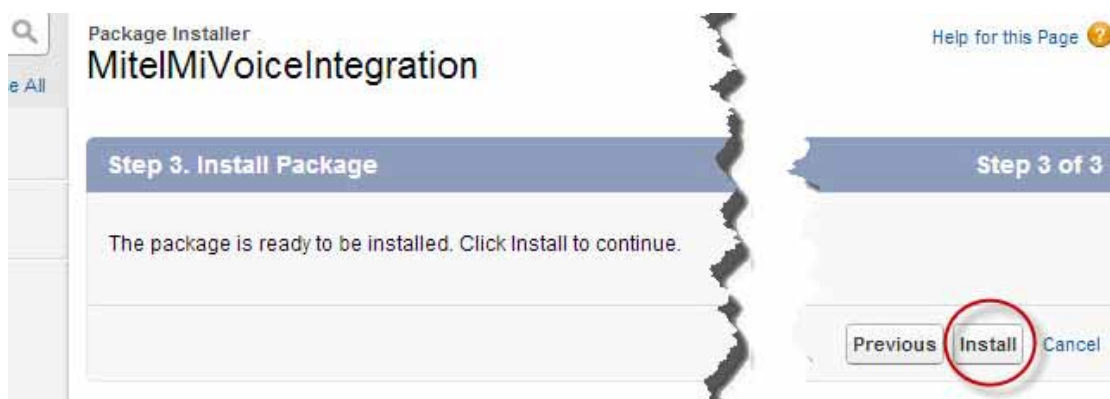

4. Salesforce indicates that the MiVoice package installation is complete.

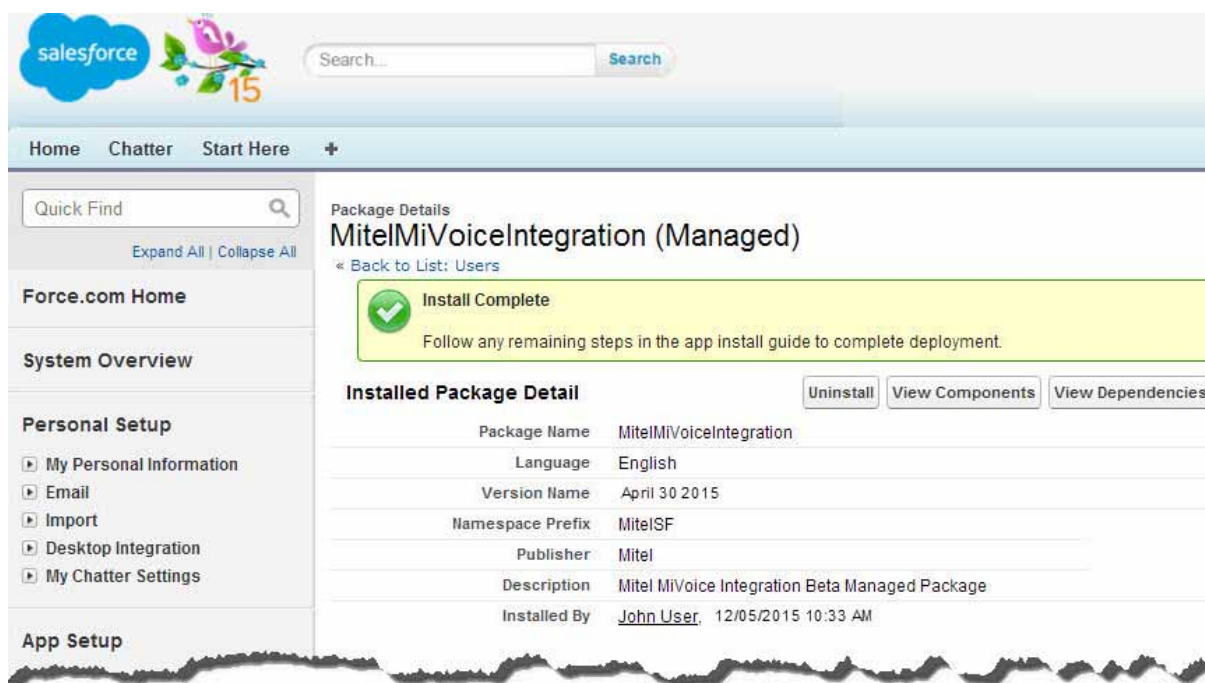

Configure Call Centers

After the installation is complete, you must customize a Salesforce Call Center for each MiVoice Business controller that will be used and add Salesforce users to each Call Center. Each Salesforce user must have a custom user profile that allows access to the MiVoice Business objects.

For example, if a MiVoice Business system cluster has two controllers, A and B, and there are 50 user phones on each controller, the Salesforce administrator must create two Salesforce Call Centers (one for each controller). The Salesforce user accounts for the 50 phones on controller A are assigned to call center A. The Salesforce user accounts for the 50 phones on controller B are assigned to call center B.



Note: There is one and only one Salesforce Call Center for each MiVoice Business instance.

1. Log into Salesforce with your administrator credentials.
2. Click **Setup** in the Salesforce banner if your default view is not the administration setup view.

A menu of items appears on the left side of the screen.


3. Select **App Setup > Customize > Call Center**.



Note: **App Setup** field is set to **Build in** the Salesforce sandbox environment.


4. Click **Call Centers**.

The main part of the screen is refreshed, displaying a list of configured Call Centers.

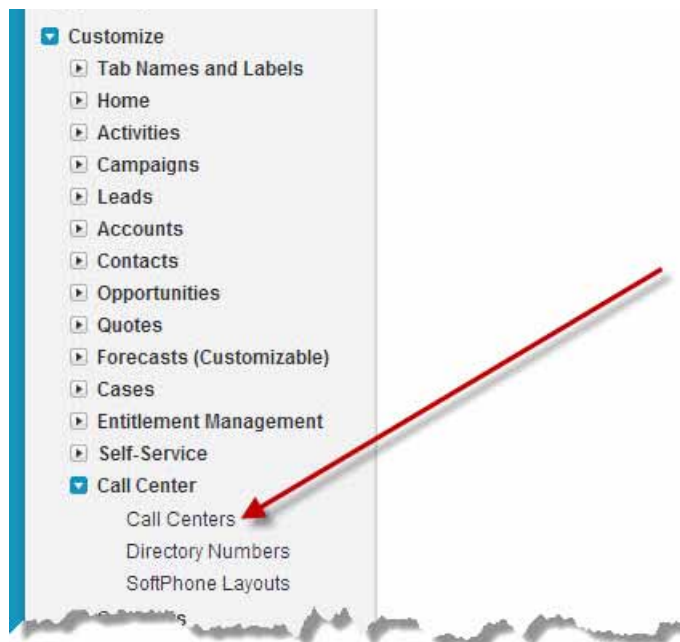

5. Click **Edit** for the Call Center you want to configure.

The screen is refreshed with the Call Center details.

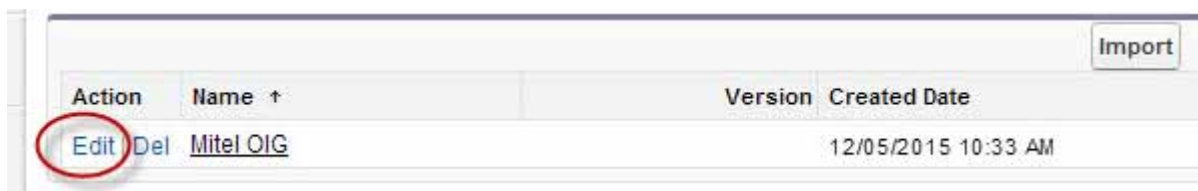

6. Enter the Call Center configuration details on the **Call Center Edit** screen. See Figure 1.

These settings apply to all users on this Call Center.

7. Enter all of the required values, and additional values, if desired. Required fields are marked with red bars.
8. Click **Save**.

The screen refreshes to view mode for the call center details.

9. Edit any additional Call Centers (one call center for each MiVoice Business system), as required.

Figure 1: Call Center edit screen

Call Center Edit		Save	Cancel
General Information			
InternalNameAAA	OIG20		
Display Name	Mitel OIG 20		
CTI Adapter URL	https://myserver.mycompany.com		
Use CTI API	true		
Softphone Height	500		
Dialing Options			
Outside Prefix	9		
Mitel OIG Settings			
MiVB IP Address	10.40.190.69		
Mitel OIG FQDN	https://myserver.mycompany.com		
Local Password	password		
Quick Notes			
Call Log Phrase 1	Call Log Phrase 1		
Call Log Phrase 2	Call Log Phrase 2		
Call Log Phrase 3	Call Log Phrase 3		
Call Log Phrase 4	Call Log Phrase 4		
Call Log Phrase 5	Call Log Phrase 5		
Wrap Up Actions (E to enable/D to disable)			
Save & Exit	E		
Save & Create Follow Up Task	E		
Save & Create Follow Up Event	E		
Save & Create New Case	E		
Save & Create New Opportunity	E		
Cancel	D		
MiCC Edition Advanced Queries - Supplemental Lic			
Search by Collected Digits	Case.CaseNumber		
Collected Digits Variable Name	userCollectedDigits		
		Save	Cancel

General Information

- **InternalNameAAA** - Enter a unique internal name. The unique name can be up to 40 alphanumeric characters, and must start with an alphabetic character
- **Display Name** - Enter a unique display name. Salesforce agents may use this name to identify the server they are using.
- **CTI Adapter URL** - Replace the displayed address with the actual FQDN of your OIG server. The FQDN is required for working with CA certificates.

Example: <https://myserver.mycompany.com/mitel/oig/OIGSalesForce/>

- **Use CTI API** - Leave this at its default value - **true**
- **Softphone Height** - Leave this at its default value - **500**

Dialing Options

- **Outside Prefix** - This setting is no longer used - provided for S/W backward compatibility

Mitel OIG Settings

- **MiVB IP Address** - Enter the IP address of the MiVoice Business server
- **Mitel OIG FQDN** - Enter the same FQDN of the OIG server as entered for the CTI Adapter URL.

Example: <https://myserver.mycompany.com/>

- **Local Password** - The Local password must match the Local Password defined on the OIG under **Allowed Application:> Mitel > MiVoice Integration for Salesforce**

Quick Notes

- Each entry is a phrase that agents can add to their call logs without typing. Enter the most commonly used call notes.
- Blank entries are not used.

Wrap Up Actions

- Choose a maximum of five wrap-up actions
- Setting **Cancel** to Disable (D) will force users to enter a wrap-up action
- If no wrap-up action is specified, ending a call will automatically save any call logs and return the agent's client to the idle state.
- Entering an **E** for any wrap-up action forces the agent to choose a wrap-up action for each call.
- Only the Enabled wrap-up actions will be listed for the agents on this call center.

MiCC Edition Advanced Queries

This configuration item is used only when the system is integrated with Mitel MiContact Center (MiCC). Supplemental licencing is required.

- **Search by Collected Digits** - Enter the *object* to search on for directing to the correct queue. To configure Advanced Queries, indicate the *object* field, where *object* can be **Campaign**, **Contact**, **Lead**, **Account**, **Opportunity**, or **Case**. Field can be a standard Salesforce field or a custom field. The field type must be **Text**, **Phone** or **Number**.
- **Collected Digits Variable Name** - MiCC server provides collected digits for every call. If there are multiple MiCC Workflows, they must all use the same Collected Digits Variable Name. Default: **userCollectedDigits**.

Configure the MiCC Edition Advanced Queries field

In setting up the search for collected digits, you must configure what kind of object the system will match on for displaying pop-up windows.


Table 1: Configuring Advance Queries field

	FIELD NAMES
Campaign	Campaign Name
Contact	Assistant (AssistantName) Asst. Phone (AssistantPhone) Data.com Key (Jigsaw) Department (Department) Description (Description) Mobile (MobilePhone) Phone (Phone) Other Phone (OtherPhone) Title (Title)
Lead	Company (Company) Company D-U-N-S Number (CompanyDunsNumber) Data.com Key (Jigsaw) Mobile (MobilePhone) Phone (Phone) Title (Title)
Account	Account Number (AccountNumber) Account Site (Site) Data.com Key (Jigsaw) Company D-U-N-S Number (CompanyDunsNumber) NAICS Code (NaicsCode) NAICS Description (NaicsDesc) Phone (Phone) SIC Code (Sic) SIC Description (SicDesc) Trade Style (Tradestyle) Year Started (YearStarted)
Opportunity	Next Step (NextStep) Opportunity Name (Name)
Case	Case Number (CaseNumber) Contact Fax (ContactFax) Contact Mobile (ContactMobile) Contact Phone (ContactPhone) Internal Comments (Comments) Web Company (SuppliedCompany) Web Name (SuppliedName) Web Phone (SuppliedPhone)


Add a Custom field for DNIS search

Use the following procedure to add a custom field for collected digits.


- 1. In Salesforce Administration, navigate to **Setup > Build > Customize > Fields**, as shown in the following graphic.

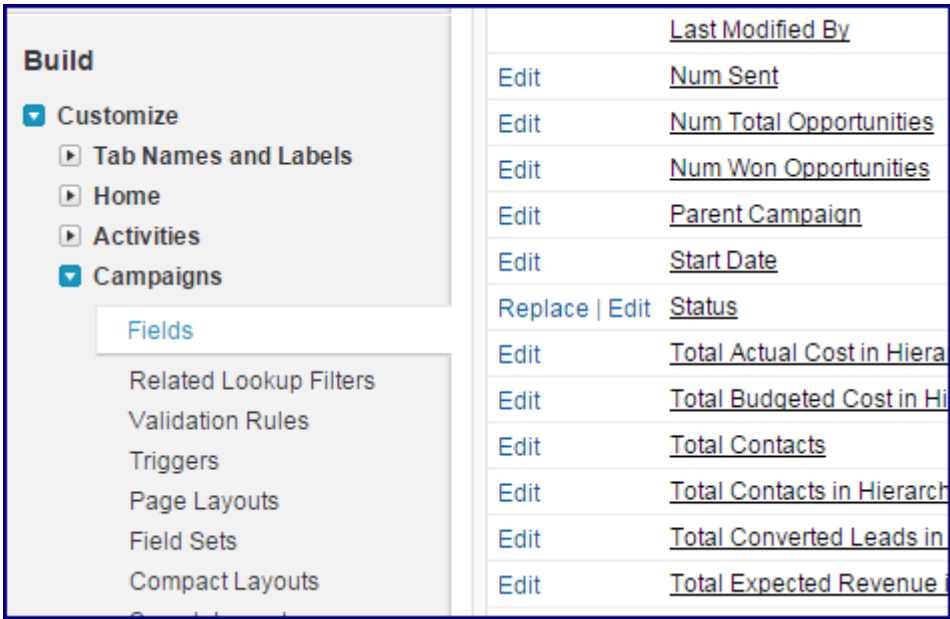

- 2. Scroll to **Campaign Custom Fields and Relationships**, and click **New**.

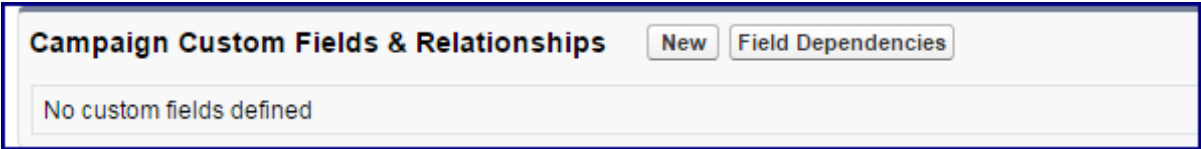

- 3. In the wizard:
 - a. Choose the field type. Select **Phone** and click **Next**.

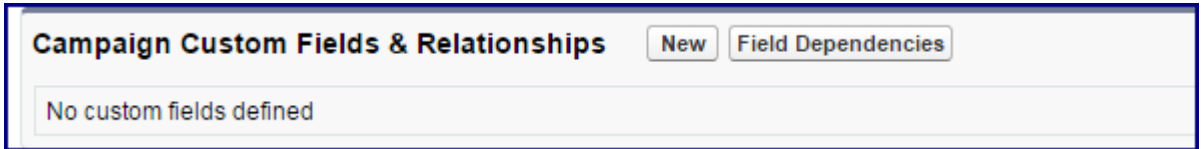

- b. Enter the details. Enter "DNIS" in **Field Label** and in **Field Name**, and click **Next**.

Field Label	DNIS	
Field Name	DNIS	
Description		
Help Text		

- c. Establish field-level security. Leave all fields at their default values (no changes), and click **Next**.

Field Label	DNIS
Data Type	Phone
Field Name	DNIS
Description	

Select the page layouts that should include this field. The field will be added as the last field in pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Field	Page Layout Name
☒	Campaign Layout

When finished, click Save & New to create more custom fields, or click Save if you are done.

- d. Add to page layouts. Leave all fields at their default values (no changes), and click **Next**.

Field Label	DNIS
Data Type	Phone
Field Name	DNIS
Description	

Select the page layouts that should include this field. The field will be added as the last field in pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Field	Page Layout Name
☒	Campaign Layout

When finished, click **Save & New** to create more custom fields, or click **Save** if you are done.

- e. To create another custom field, click **Save & New**. Repeat the procedure through the wizard.
- f. To save and exit the wizard, click **Save**.


Campaign Custom Fields & Relationships				
		New Field Dependencies		
Action	Field Label	API Name	Data Type	Controlling Field
Edit Del	DNIS	MitelSF__DNIS__c	Phone	

Logging call duration

You can configure Salesforce to log the duration of the calls.

To enable logging call duration:

1. In the Salesforce user interface, click **Setup**.
2. On Setup page, navigate the menus on the left side of the page: **Customize > Activities > Task Page Layout**.

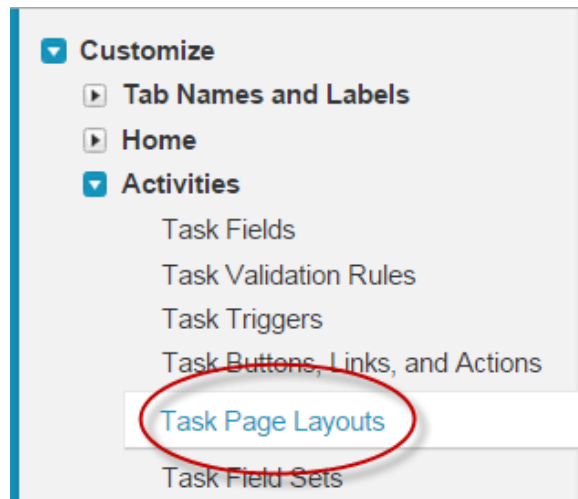


3. In the Task Layout, click **Edit**.
4. Drag and drop **Call Duration**, **ANI**, and **DNIS** to the **Task Detail** below.

Create a new call center

A new MiVoice Business controller can be added quickly by cloning a server that is already configured in Salesforce.

1. If you are already in the view mode of the Call Center, go to step "4".
2. Navigate to the list of Call Centers as you did in steps "1" to "4" of "Configure Call Centers" on page 6.
3. Click the name of an existing MiVoice Business Call Center.

The screen refreshes with all the configuration details of the Call Center.

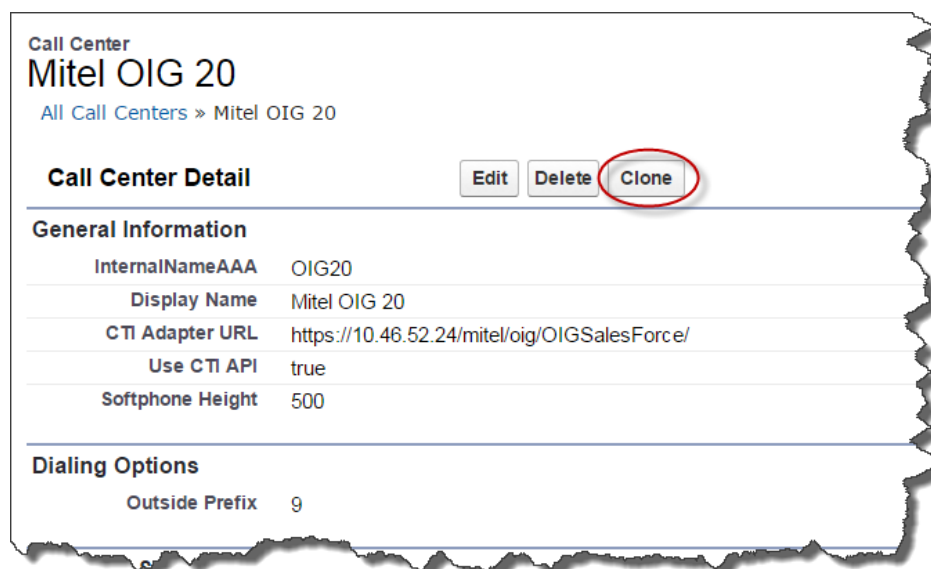

4. Click **Clone**.

A call server edit screen opens with the same details as the Call Center that was cloned.

5. Enter a new internal name.

You must enter a new internal name before the Call Center can be saved.


6. Edit any other Call Center details.

7. Click **Save**.

Enable the sidebar for Cases


1. In **Setup**, navigate to **Customize > Cases > Page Layouts**.

2. For the **Case Page Layout**, click **Edit**.

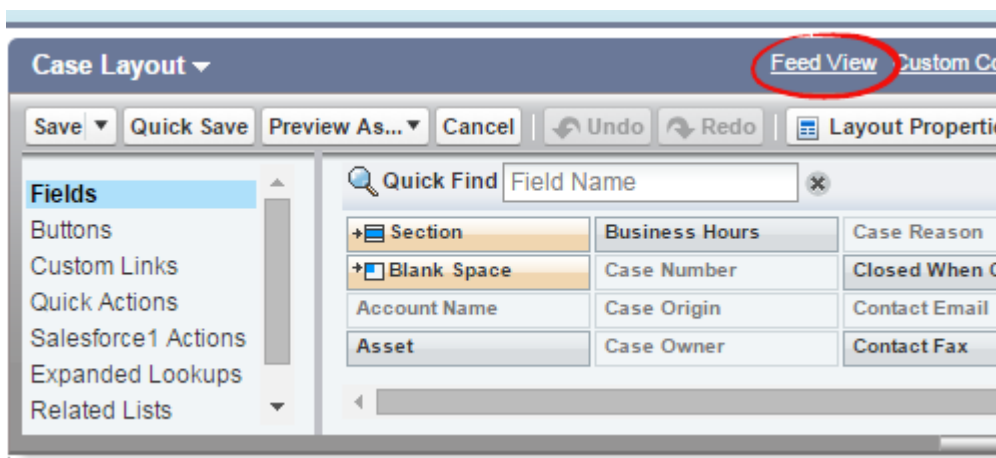

3. Click **Feed View**.

4. Scroll down to the **Other Tools and Components** section.

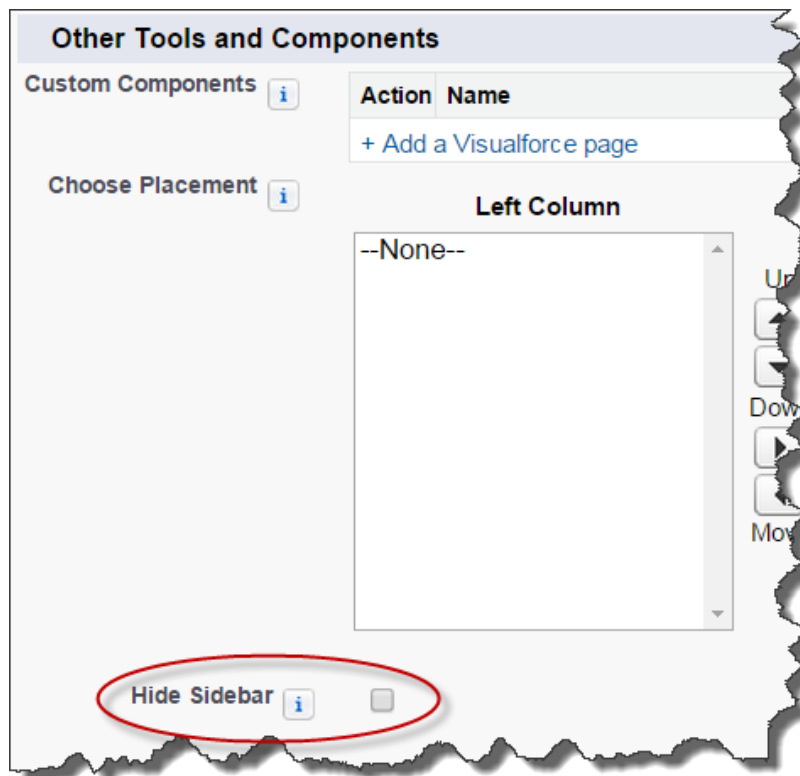

5. Deselect **Hide Sidebar**.

Add users to a Call Center

Salesforce users must be added to a Call Center to use the MiVoice Integration for Salesforce. Users must also be configured on the MiVoice Business system that the Call Center is pointed to. Before adding users, make sure that you have a mapping of Salesforce users to Call Centers.

1. If you are already in the view mode of the Call Center, go to step "4".
2. Navigate to the list of Call Center as you did in steps "1" to "4" of "Configure Call Centers" on page 6.

3. Click the name of the Call Center.

The screen refreshes to display all of the configuration details of the Call Center.

4. Click **Manage Call Center Users**.

The screen refreshes to display the list of users already added to the Call Center.

5. Click **Add more users**.

The screen refreshes with a dialog box that has drop down criteria for the search operation.

--None--	--None--		AND
--None--	--None--		AND
--None--	--None--		AND
--None--	--None--		AND
--None--	--None--		

Filter By Additional Fields (Optional):

- You can use "or" filters by entering multiple items in the third column, separated by commas.
- For date fields, enter the value in following format: 4/16/2014
- For date/time fields, enter the value in following format: 4/16/2014 10:45 AM

Find

--None--	--None--
Full Name	equals
First Name	not equal to
Last Name	starts with
Username	contains
Alias	does not contain
Nickname	less than
Active	greater than
Last Login	less or equal
Email	greater or equal
Phone	includes
Extension	excludes
Fax	within
Mobile	
Street	
City	
State/Province	
Zip/Postal Code	
Country	
Company Name	

6. Enter the criteria and values to search for.

The users must already be configured in Salesforce. Users already added to the Call Center do not appear in the list.

7. Select the users you want to add to the Call Center, and click **Add to Call Center**.

8. Perform new searches and select users until all the users have been added to the Call Center.

9. Confirm that each new user added to the Call Center has the correct phone number and profile type specified in their Salesforce user profile.



Note: Each user must have a phone number entry. Normal practice is to use the MiVoice Business telephone number in the phone number field. MiVoice Integration for Salesforce works only on the prime line of the user.

Create a custom Salesforce user profile

Salesforce user profiles define the privileges and features that Salesforce users can access and use. Salesforce users for the MiVoice Integration must have a custom Salesforce user profile.

Use the instruction in the Salesforce documentation to perform the following steps:

1. Copy an existing Salesforce profile to create a new custom profile (Custom-MiVoice user, for example).
2. Edit the custom profile to allow access to the following MiVoice objects:
 - `OIGUserFavorites`
3. Save the custom Salesforce user profile.
4. Update the Salesforce users to use the custom profile.

Send instructions to each new user

- [“Configuration instructions” on page 17](#)
- [“Wrap-up instructions” on page 17](#)

Configuration instructions

Notify each user of the required settings for their MiVoice Integration for Salesforce UI and what the incoming call matching order should be. The matching settings are:

- **ANI Search** - This option matches records on the caller telephone number. ANI stands for Automatic Number Identification.
This option can be used both with General Business Edition and MiContact Center Edition licenses.
- **DNIS Search** - This option matches records on the Salesforce Campaign record. DNIS is the Dialed Number Identification Service.
This option can be used both with General Business Edition and MiContact Center Edition licenses.
- **Collected Digits Search** - This option matches records on the custom data (Collected digits) coming from the MiContact Center IVR system. If the incoming custom data matches an existing record in the Salesforce database, the Case, Account, or Opportunity record, for example, is displayed.
The default Salesforce record and field to search are defined in the Salesforce XML configuration file. The Collected Digits Search field type is one of “text”, “phone”, or “number”. Refer to the Salesforce documentation for more information.
This option can be used only with MiContact Center Edition licenses.
- **New Contact**: When this option is selected, a **New Contact** page is opened if the caller is not found in Salesforce.

Wrap-up instructions

If you have changed the Wrap Up Actions from their defaults, it is recommended that you include instructions and/or training for the intended use of each of the Wrap Up options users will see.

Configure the user interface for a different language

The language of the MiVoice Integration for Salesforce is set based on the Browser locale. Table 2 lists the supported languages.

Table 2: Supported languages for UI localization

Chinese (Simplified)	Chinese (Traditional)
Danish	Dutch
English	Finnish
French	German
Italian	Japanese
Korean	Norwegian
Portuguese	Russian
Spanish	Swedish
Thai	

Configure Mitel OIG for E.164 dialing support

In the Mitel OIG **Network Elements** tab, the **Custom** setup allows you to configure for E.164 telephone directories. Some national telephone bodies or telephone companies have implemented an Internet-based database for their numbering spaces. E.164 numbers may be used in the Domain Name System (DNS) of the Internet in which the second-level domain e164.arpa has been reserved for telephone number mapping (ENUM).

For detailed instructions, see the *Mitel OIG Installation & Maintenance Guide*.

Upgrade

Upgrading to a new version of the MiVoice Integration for Salesforce does not require re-installation of the product. When new versions are available, a Salesforce App Exchange wizard will guide you through upgrading your MiVoice Integration for Salesforce application. Follow the on-screen steps to complete the upgrade.

A new version of Mitel OIG server may be required to provide new features for MiVoice Integration for Salesforce; the Mitel OIG is part of the overall solution. For example, to get a new feature for MiVoice Integration for Salesforce, only an update of the Mitel OIG software may be required. Refer to the Software Release Notes for each new version of Mitel OIG to determine what is needed.



Note: To see the upgraded version of the application you may need to refresh your session by logging out and then logging back in to your Salesforce administrator account, or in some cases, closing and re-opening the browser before logging in again.

Troubleshooting tips

The following items are intended to help administrators solve and answer common questions about the user interface and its behavior.

- **MiVoice CTI options:** When a connected party hangs up while the MiVoice user is creating a consultation call to a third party, the MiVoice user is presented with a disconnect call option only after the MiVoice user is in a call with the third party. For example, the MiVoice user does not have hold, conference, transfer, and dial pad options.

The agent can get control of the phone again by clicking Clear (Hang up), and then dealing with the call wrap-up as required by your deployment.

- A MiVoice Business SIP trunk must be properly configured for a Mitel OIG application to receive the required call status event data for SIP trunk call scenarios. The **Assert P Header** and **Allow Display Update** must be enabled in SIP peer signaling form.

Refer to the MiVoice Business System Administration Online Help for calling party number configuration details.

- **Encourage users to refresh their browser window** when the MiVoice client appears not to reflect the current state of the call. Individual user desktop and browser activities can affect the display of the client during use.
- **Screen-pop issues:** Ensure that MiVoice Integration for Salesforce is configured with the user's prime line, and not with secondary lines, Personal Ring Groups, or line appearances. Also ensure that pop-ups are enabled.

Microsoft Internet Explorer does not support web browser call notification in the bottom left corner of the monitor for the web browser; Google Chrome web browser does support call notification display.

- If the agent has been inactive for a time, and the MiVoice Integration for Salesforce UI appears to not be working properly when the agent returns to work, check that the Salesforce

timeout setting: **Force logout on session timeout** is enabled. This setting is enabled by default.

